

°C	-20	-10	0	+10	+20	+30	+40	+50	+60	+70	+80	+90	+100	+110	+120
Ω	1367	1495	1630	1772	1922	2080	2245	2417	2597	2785	2979	3182	3392	3607	3817

a Distancia

- PTC2000 IP65. Rango soportado: -40°C a +200°C

SFC200



PTC2000




ECO



S.R.




FC200
IP67

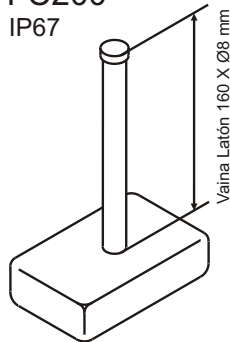


Caja: 90 x 50 x 26
plástico negro


ECO

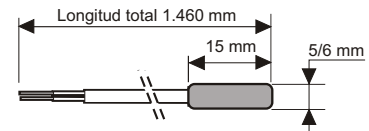

PTC2000

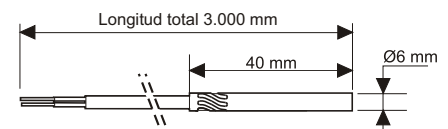

S.R.

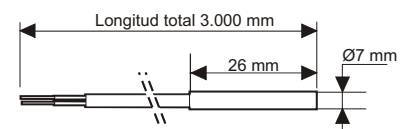

SFC200	2.907	Vaina de latón. Rango de -40°C a +140°C
PTC2000	4.339	Cable silicona 1,5m. Rango -40 a +140°C
PTC2000	4.343	Cable silicona 3m. Rango -40 a +140°C
PTC2000 ECO	4.683	Cable PVC 1,5m. Rango -50 a +120°C
S.R. Suelo Radiante	5.770	Doble aislamiento 3m. Rango -30 a +80°C

Sonda interior



- Rango de lectura: -5°C a +45°C
- Respuesta: a 25°C da 1950 / 1990
- IP20
- Medidas: 76 x 76 x 30 mm. Incluye marco caja Ø60

Sonda Pasillo PTC

5.266

Sonda compatible con la serie EC

Sonda Exterior Temperatura



- Mide la temperatura del exterior.
- Rango: -40 a +80°C
- IP65

Sonda Temperatura

5.664

Sonda PTC2000 de -40 a +80°C