

GUARANTEE CONDITIONS Thermostat for Underfloor Heating **QUAD-RD**

This appliance has a two-years guarantee limited to replacement of defective parts.

We will not accept any responsibility for damage caused to the appliance by poor handling.

The guarantee does not include:

- Appliances with a damaged, effaced or altered series number.
- Appliances which have not been connected or used following the instructions that accompany it.
- Appliances which have been altered without the prior consent of the manufacturer.
- Appliances damaged by blows of liquid spills or gaseous emissions.

VERY IMPORTANT!

It is installer's responsibility to fit electrical protection suitable for the installation (**STANDARDIZED**).

This appliance should be mounted on a universal recessed box.

Device designed for use in non-polluted environments.

Independently mounted control device for surface mounting and connection to fixed wiring.

We reserve the right to make modifications without prior notice.

Sonder Regulación, S.A.

Avda. La Llana, 93
08191 RUBÍ
(Barcelona) Spain
www.sonder.es



SELECTION OF THE REGULATION MODE:

The two regulations modes, NORMAL and ECO, are independent and both can be adjusted to temperatures between 5 °C and 35 °C.

Depending on the selected values, you can use the setting for NOCTURNAL REDUCTION, e.g. NORMAL at 22 °C and ECO at 18 °C. If, on the contrary, you programme two values, e.g. NORMAL at 22 °C and ECO at 20°C, you can have two COMFORT levels.

VERY IMPORTANT: The thermostat connects or disconnects the relay when the room temperature setting or the temperature programmed for the underfloor heating is reached.

REGULATION MODE IN HEATING BY DEFAULT

THERMOSTAT WITH TWIN MANUAL SETTING > NORMAL MODE AND ECO MODE >

Upon connection the room temperature is displayed (1st temperature)

The screen alternates Room Temperature & Floor Temperature. a 1 appears.

Pressing ∇ changes to 2nd temperature regulation is displayed

Pressing ∇ returns regulation to Normal Mode(1st temp.)

CHANGING THE REGULATION TEMPERATURES

Set the thermostat to the regulation mode you want to change. NORMAL Mode or ECO Mode

Pressing \wedge will change the temperature (flashing display)

Pressing ∇ reduces the temperature (flashing display)

Pressing \wedge increases the temperature (flashing display)

Wait 3 seconds and it returns to room temperature (fixed display)

OFF

With the display on Room Temperature (fixed display)

Press the two keys at the same time. OFF and room temperature alternate.

ON

Pressing \wedge or ∇ . Returns to room temperature (1st temp. or 2nd temp. ECO)

ENTRY INTO OPTIONAL PARAMETER SETTINGS

Pressing \wedge will input the desired temperature (flashing display)

Pressing \wedge and ∇ for 10 sec. Both at once

Will enter optional parameters

Advance to the next parameter Change the value of the parameter

FACTORY SETTINGS

Viewing of the Tem. in °C or °F (Parameters values °C/°F)

Blocking the minimum desired temperature limit (5 to 19°C / 41 to 66°F)

Blocking the maximum desired temperature limit (20 to 35°C / 68 to 95°F)

Calibration viewed Temperature (room) (-3 to 3°C / -5.4 to 5.4°F)

Differential settings (of 0,1 to 2°C / 0,2 to 3,6°F) (*# of 0,2 to 2°C / 0,4 to 3,6°F)

Anti-frost Function Adjustable OFF or from 5°C to 18°C. from 41°F to 64°F.

Underfloor heating temperature Adjustable from 5°C to 35°C. from 41°F to 95°F.

Floor Temperature Sensor Calibration (from -5 to 5°C / -9 to 9°F)

Changing Control Type > HEATING (factory) / COOLING

CONTROL TYPE

If you press the key once, you view the current Control type, if you press again, you CHANGE the Control type.

Heating / **Cooling**

In Cooling a higher differential is advisable to protect the motor.

RESET SETTINGS

Press the key for 10 seconds and the parameters change to the factory settings.

PROBE ERROR

This informs you that the Sensor or its cables are cut off or disconnected.

TECHNICAL DATA

Dimension:

Probe longitud: 3 mts.
weight: net = 108 grs. / gross = 135 grs.

Schematic:

Control scale:.....5° to 35°C.

Ambient temperature:.....Tmin. 0°C, Tmax. 40°.

Storage temperature:.....maximum 50°C.

Power supply:..... 230V~ +10% 50/60Hz. -15%

Breaking power (Volt-free Contacts):..... 16(7)A 250V~.

Maximum cable size for connection: Supply..... 1,5mm² / Relay..... 2,5mm².


Contamination degree:..... 2.

Ingress Protection:..... IP20.

Software type A:..... (Action type 1.B).

Assigned pulse voltage:..... 2500 V.

PTC2000 Temperature Sensor from -30 to 80 °C, accuracy 1.5%, Contacts Without Polarity, Log. Sensor 3m & IP67.

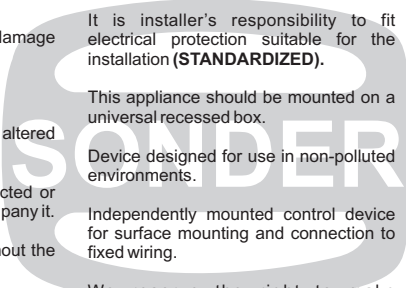

Cod.:5795 ING.V1-SEP-09