

Conditions of Guarantee

This equipment has a 2 years guarantee, which means it only replaces the faulty part.

We do not take any responsibility for deteriorated equipment, which are a result of bad handling.

The guarantee does not include:

- Equipment with deteriorated, worn or modified serial number.

- Equipment whose connection or use has not been carried out in accordance with the indications attached to equipment.

- Equipment modified without prior agreement from manufacturer.

- Equipment whose deterioration is due to bangs or emanations of liquids or gases.

VERY IMPORTANT!

It is installer's responsibility to fit electrical protection suitable for the installation (STANDARDIZED).

This appliance should be mounted on a universal recessed box.

Device designed for use in non-polluted environments.

Independently mounted control device for surface mounting and connection to fixed wiring.

We reserve the right to make modifications without prior notice.

Sonder Regulación, S.A.

Avda. La Llana, 93
08191 RUBÍ
(Barcelona) Spain

www.sonder-regulacion.com



Cod.:4781INGV5-02/05



MODE HEATING BY DEFAULT



Entering in optional adjustments.

Optional parameter adjustments.

Values by defect.

- Blocking of the ideal temp. for a minimum limit.:** Adjustable between 5° and 19°C.
- Blocking of the ideal temp. for a maximum limit.:** Adjustable between 20° and 35°C.
- Adjustment of visual temp.:** Between -3 and 3°C.
- Mode:** Heating (BY DEFAULT) - (🔥) or Cooling - (❄️) It is recommended that the differential inrefrigeration mode be increased.
- Differential (Hysteresis):** Adjustable between 0,1 and 2°C.

Technical information

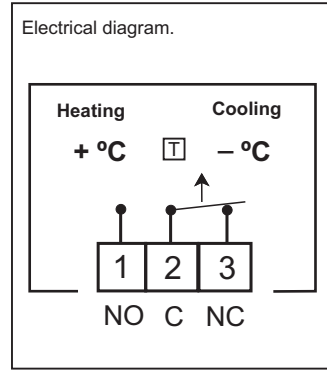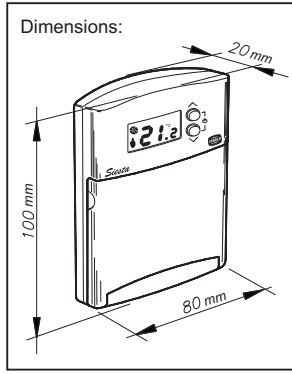

Regulation scale :from 5 to 35°C.
 Max. Room temperature :Tmin. 0°C, Tmax 40°C.
 Storage temperature :maximum 50°C.
 2 Alkaline batteries : LR03 (AAA).
 Low battery indicator : "Lb".
 Battery duration :2 years aprox.
 Breakage power (Contacts) :8(3)A 250Vac.
 Connected wire section :1,5mm².
 Wiring type:..... H-05V-K.
 Ingress Protection :IP20.
 Software type A :Action type 1B.
 Standard :EC.